

KUNARK HITECH MACHINING & SALES PVT.LTD.



Kunark House, 269, Kunark Marg, Kaman Bhiwandi Road, Kaman,


Vasai Road (East), Dist: Thane -401208, Maharashtra, India.

Mobile&Whatsapp: +91 9867973046, Mobile 2:- +91 7977043901

Goggle Map:- <https://maps.google.com/maps?q=19.372000+72.902095>


Email: info@jkgears.com, dalbirbright@gmail.com website: www.jkgears.com



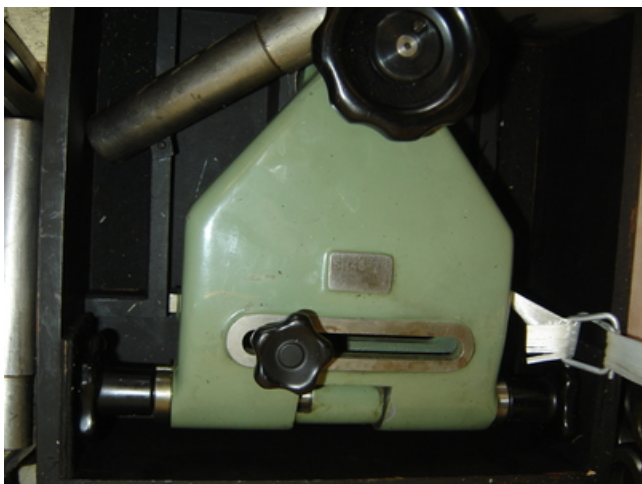





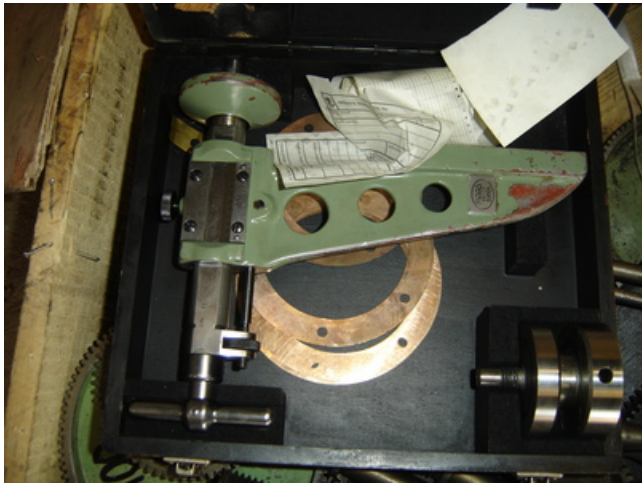




Video :-

Please Click Here For Video No. 01	
Please Click Here For Video No. 02	
Please Click Here For Video No. 03	

<i>Machine Id</i> :- 812	<i>Serial No</i> :-
<i>Category</i> :- Gear Shapers	<i>Model</i> :- 45
<i>Country</i> :- Switzerland	<i>Make</i> :- Maag
<i>Type of Machine</i> :- Gear Shaper	<i>Year</i> :- 1973
<i>Weight</i> :- 0.0	<i>Dimensions</i> :-
<i>Power</i> :-	<i>Location</i> :- Mumbai Warehouse,India

Specification :-

The MAAG SH-45 Gear Cutting Machine is suitable for machining of:

*** External & internal cylindrical gears**

*** Pinions ***

Spur & helical gears *

Gear teeth with longitudinal and profile corrections

*** Cluster gears**

*** Double helical gears**

*** Sprocket wheels ***

PARTICULAR ADVANTAGES:

*** Wide range of applications (gear diameters 0.8' to 18')**

*** High economy (Thanks to simple, inexpensive tooling and high rate of metal removal)**

*** High accuracy (Long life assured by operating principle and robust machine construction)**

*** Automatic machining cycles (A large number of automatic working cycles are available for the various fields of application)**

PRINCIPAL SPECIFICATIONS AS PER CATALOGUE:

Maximum/minimum rated diametrical pitch... 4.2/25

Maximum/minimum rated gear blank... 18'/0.8'

Maximum rated spur gear face width... 4.75'

Maximum/minimum number of teeth... 250/6

Maximum helix angle... 60 Deg.

Maximum weight of gear and fixture... 880 lbs.

Maximum/minimum stroke of cutter slide... 5.7/0

Maximum/minimum position of cutter above table at stroke... 12.6/5.5

Range of cutter strokes (12)... 37-235 SPM

Strokes per pitch, steplessly adjusted... 9 half 80