

# KUNARK HITECH MACHINING & SALES PVT.LTD.



Kunark House, 269, Kunark Marg, Kaman Bhiwandi Road, Kaman,

Vasai Road (East), Dist: Thane -401208, Maharashtra, India.

Mobile&Whatsapp: +91 9867973046, Mobile 2:- +91 7977043901

Goggle Map:- <https://maps.google.com/maps?q=19.372000+72.902095>

Email: [info@jkgears.com](mailto:info@jkgears.com), [dalbirbright@gmail.com](mailto:dalbirbright@gmail.com) website: [www.jkgears.com](http://www.jkgears.com)


















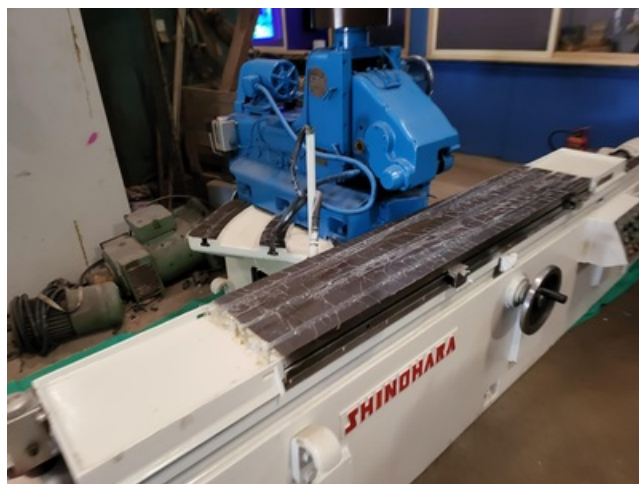














Video :--

Please click here for video no. 1	
Please click here for video no. 2	
Please click here for video no. 3	
Please click here for video no. 4	
Please click here for video no. 5	
Please click here for video no. 6	
Please click here for video no. 7	
Please click here for video no. 8	
Please click here for video no. 9	
Please click here for video no. 10	

<b>Machine Id</b>	<b>:- 1371</b>	<b>Serial No</b>	<b>:-</b>
<b>Category</b>	<b>:- Rack Milling Machine</b>	<b>Model</b>	<b>:- SR II</b>
<b>Country</b>	<b>:- Japan</b>	<b>Make</b>	<b>:- Shinohara</b>
<b>Type of Machine</b>	<b>:- Used Rack Cutting Machine (Choice Of Two Machines)</b>	<b>Year</b>	<b>:-</b>
<b>Weight</b>	<b>:- 0.0</b>	<b>Dimensions</b>	<b>:-</b>
<b>Power</b>	<b>:-</b>	<b>Location</b>	<b>:- Mumbai Warehosue, India</b>

Specification :-

**Max. Cutting length 1600 mm (3 SLOTS)**

**Milling travel / milling width cross max. 300 mm**

**Module in steel / cast iron, max. 16 / 18**

**Table clamping size 510 x 2.400 resp. 275 x 2.120 mm**

**Mounting height under cutter, depending on cutter Ø150 mm**

**Cutter Ø, min./max Ø125 + 2 x cutting depth / Ø280 mm**

**Cutter width max. without/with counter bearing support 50 / 140 mm**

**Cutter mandrel Ømax. 32 mm**

**Milling spindle head, swivelling ( for relief cuts ) right / left 30 / 45 °**

**Milling spindle speeds steplessly adjustable 40 - 120 rpm**

**Milling slide swivelling right / left for Helix Cuts 30 °**

**Feeds, infinitely variable (milling slide) 0 - 1.300 / 2.000 mm/min**

**Quick return of WP-table 10.000 mm/min**



**Milling spindle drive 5,5 kW**

**Total electrical load 10 kW - 400 V - 50 Hz**

**Weight 5.000 kg**